




POLY STRAINER SCREEN

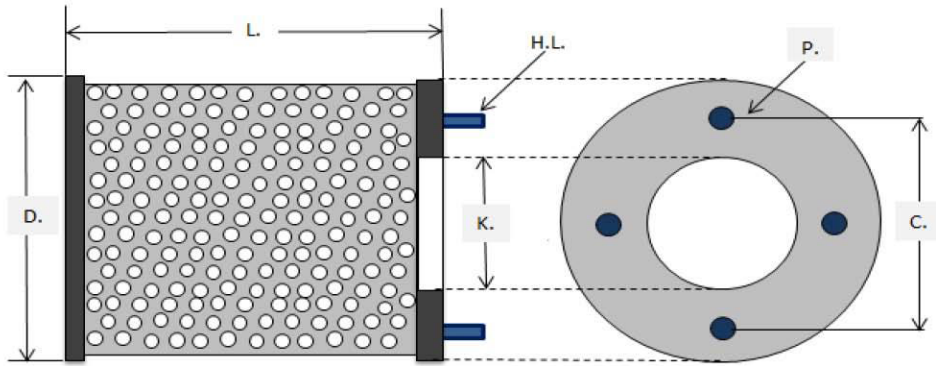

Diam. Nominal Inches	D. Mm	L. Mm	K. Interior diameter	H. Screw Diam.	H.L. Screw length	P. # Screws	C. Dist. between screws
3"	10.23"	9.05"	2.95"	5/8"	2.28"	4	6.00"
4"	10.23"	11.02"	3.93	5/8"	2.28"	4	7.50"
5"							
6"	14.56"	13.18	5.82"	5/8"	2.4"	4	9.50"
8"	20.47"	14.96"	7.48"	3/4"	2.75"	4	11.75"
10"	20.47"	18.89"	9.92"	3/4"	3.46"	4	14.25"
12"	20.47"	21.25"	11.02"	3/4"	3.93"	6	17.00"

MAIN CHARACTERISTICS OF THE TERMOPRO POLY STRAINER

OPERATES IN ANY POSITION. Regardless of the position in which it is installed – horizontal, vertical or angular -the TERMOPRO PolyCheck Valve operates normally and effectively. EASY TO INSPECT AND MAINTAIN. The TERMOPRO PolyCheck Valve can be readily removed for inspection. All internal working parts are easily accessible and replaceable without the use of special tools. Simplicity of design assures long, trouble-free service.

The strainer has at least 8 times bigger filter area than the suction area making it ideal for dirty water.